



【Jenkins】執行git專案上的pipeline

參考：<https://ithelp.ithome.com.tw/m/articles/10287403>

- Definition: Pipeline script from SCM
- SCM: Git
- Repository URL: <https://github.com/ben4932042/jenkins-ithome.git>
- Branch Specifier (blank for 'any'): main
- **Script Path:** `jobs/ithome-day3-sample-job/Jenkinsfile` => pipeline 檔案

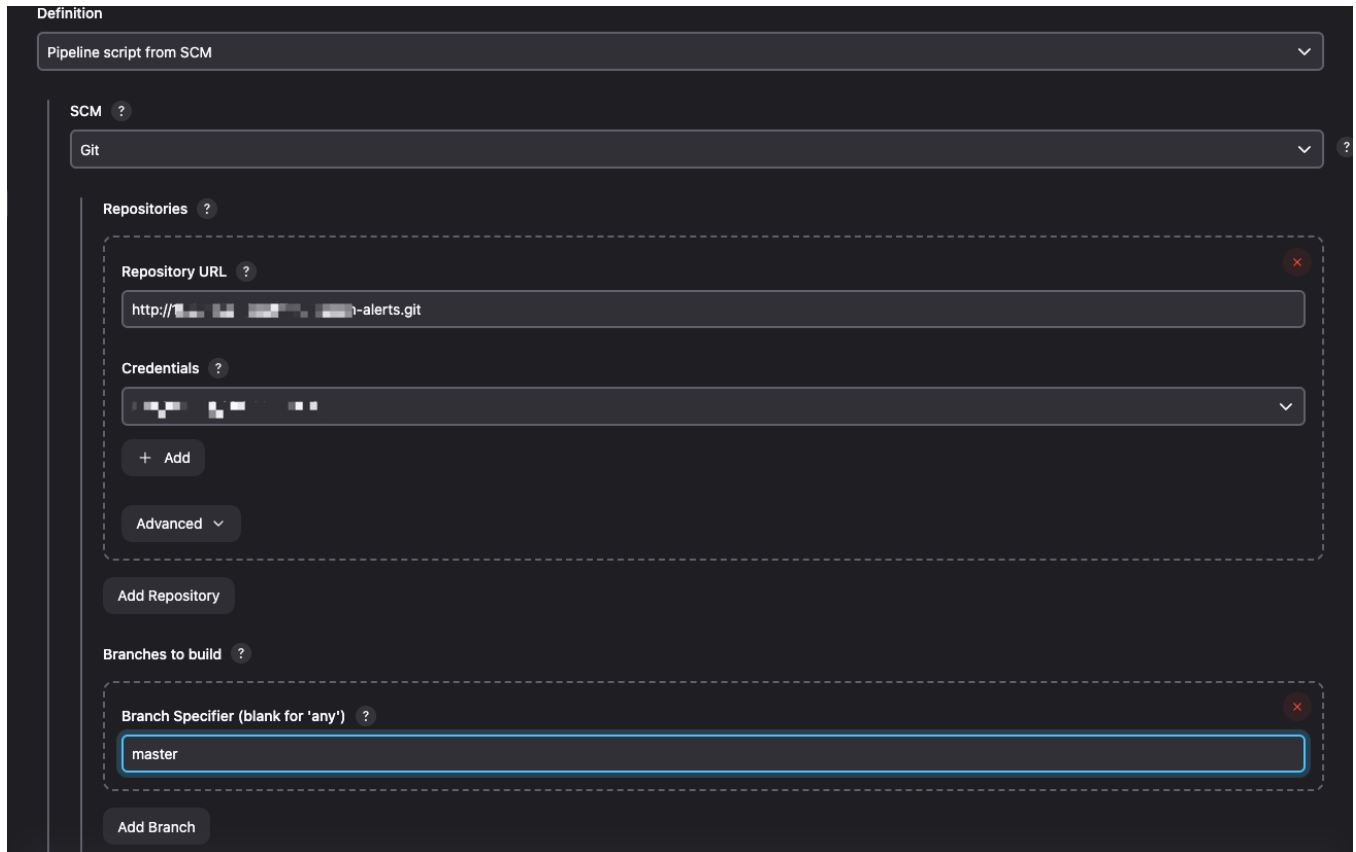

This screenshot shows the 'Definition' configuration page in Jenkins. The 'Definition' dropdown is set to 'Pipeline script from SCM'. Under the 'SCM' section, 'Git' is selected. The 'Repositories' section contains one repository with the URL 'http://[redacted]-alerts.git' and a credential dropdown. Below this is an 'Add Repository' button. The 'Branches to build' section has a 'Branch Specifier (blank for 'any')' field set to 'master' and an 'Add Branch' button.

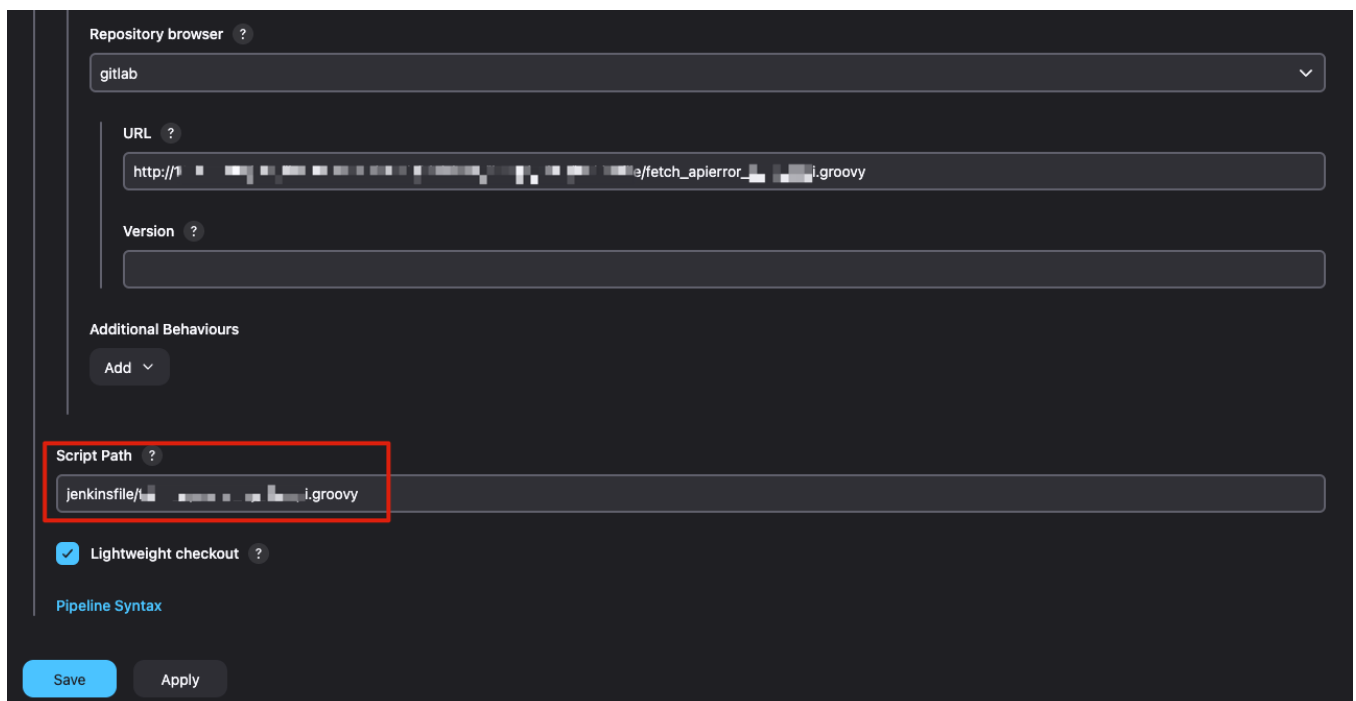

This screenshot shows the 'Repository browser' configuration page in Jenkins. The 'Repository browser' dropdown is set to 'gitlab'. The 'URL' field contains 'http://[redacted]/fetch_apierror_[redacted].groovy'. The 'Version' field is empty. Below this is an 'Add' button under 'Additional Behaviours'. The 'Script Path' field is highlighted with a red box and contains 'jenkinsfile/[redacted].groovy'. At the bottom, the 'Lightweight checkout' checkbox is checked. There are 'Save' and 'Apply' buttons at the very bottom.

🕒 修訂版本 #1

★ 由 treeman 建立於 20 2025 11:06:08

✍ 由 treeman 更新於 20 2025 11:10:22